


Art. 942

INSERTI FILETTATI INOX A TESTA RIDOTTA

AISI 304

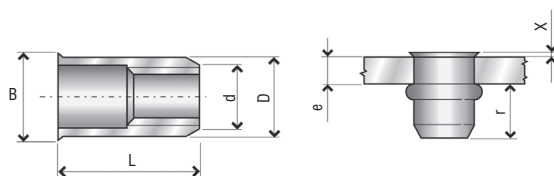


Articolo	TIPO	d	e	r Min --- Max	ϕ	D	B	X	L
942APR	M4 PR	M4	0.5-:-1.5	6.3-:-6.7	6.4	6.3	6.9	0.4	10.5
942BPR	M5 PR	M5	0.5-:-2.0	7.4-:-7.8	7.2	7.1	7.7	0.4	12
942CPR	M6 PR	M6	0.7-:-2.5	8.8-:-9.6	9.6	9.5	10.2	0.5	14
942DPR	M8 PR	M8	1.0-:-3.0	10.0-:-10.8	10.6	10.5	11.3	0.5	16

N.B.: DIFFERISCONO DAL MODELLO FTR NELLA DIMENSIONE DEL DIAMETRO ESTERNO.

Art. 944

INSERTI FILETTATI INOX A TESTA SVASATA

AISI 304

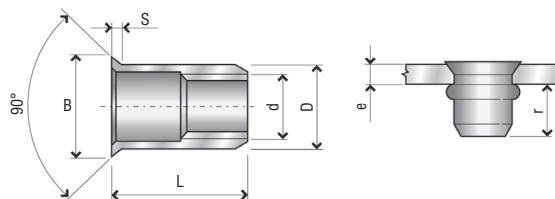

Articolo	TIPO	d 6 H	e	r Min --- Max	ϕ	D 0 -0,1	B 0 -1	S	L
944A	M 4 FTS/C	M 4	1.5-:-3.5	5.8-:-6.3	6	5.9	9	1.5	11
944C	M 4 FTS/L	M 4	3.5-:-5.0	5.8-:-6.3	6	5.9	9	1.5	13
944D	M 5 FTS/C	M 5	1.5-:-3.8	6.8-:-7.3	7	6.9	10	1.5	13
944F	M 5 FTS/L	M 5	3.8-:-6.0	6.8-:-7.3	7	6.9	10	1.5	15
944G	M 6 FTS/C	M 6	1.5-:-3.8	8.5-:-9.2	9	8.9	12	1.5	15
944K	M 6 FTS/L	M 6	3.8-:-6	8.5-:-9.2	9	8.9	12	1.5	17
944L	M 8 FTS/C	M 8	1.5-:-3.8	9.5-:-10.4	11	10.9	14	1.5	16,5
944N	M 8 FTS/L	M 8	3.8-:-6.0	9.5-:-10.4	11	10.9	14	1.5	19
944P	M10 FTS/C	M 10	1.5-:-3.5	11.6-:-12.2	12	11.9	15	1.5	18
944R	M10 FTS/L	M 10	3.5-:-6.0	11.6-:-12.2	12	11.9	15	1.5	21

INSERTI INOX